## **Power Supply Series**



## **Features**

*elock Power* **Supply KY-100B** offers consistent & reliable regulated full 5 Amps 12Vdc output. Built-in with Battery charger circuit that enables user to have battery back-up features with battery. Customized metal casing to fix with 2 units of backup batteries

- Overload Protection
- Built-in backup battery charger ( can fix with two backup batteries )
- Battery low cut-off
- Output voltage adjustment.
- Dimension:- 330mm W x 300mm H x 88mm D
- Beige color
- Safety Approval:- CE

## **Specification**

- Input Voltage: 220~240 Vac
- Input frequency: 50Hz/60Hz
- Output no load voltage: 13.5 Vdc
- Output rated voltage: 13.0 Vdc
- Output rated current: 5.0 Adc
- Load regulation: NL to FL 3%
- Battery low cut-off: 10.5 Vdc
- Operating temperature: 0~65 deg C
- Casing Surface finishing:

Oven baked Epoxy Powder coating ( Beige color )



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (640972-U)

No, 7 Jalan TPP 1/15, Taman Industri Puchong Batu 12, Jalan Puchong, 47100 Puchong Selangor, Malaysia


 TEL
 +603 8061 4589
 +603 8061 3201

 FAX
 +603 8944 1715

 WEB
 www.elock2u.com

 EMAIL
 sales@elock2u.com

## Back Up DC Power Supply System Diagram

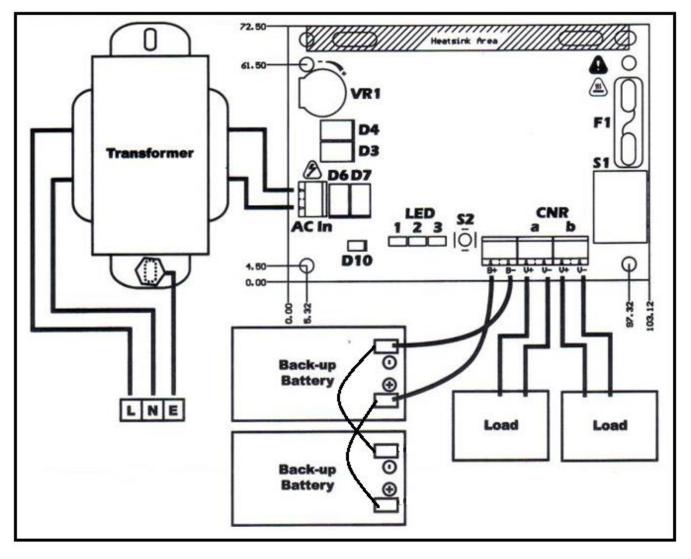



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No, 7 Jalan TPP 1/15, Taman Industri Puchong Batu 12, Jalan Puchong, 47100 Puchong Selangor, Malaysia

 TEL
 +603 8061 4589
 +603 8061 3201

 FAX
 +603 8944 1715

 WEB
 www.elock2u.com

 EMAIL
 sales@elock2u.com