

EL-820R

Features

EL-820R Roller Shutter Sensor (Floor Mount) offers high grade

magnet & provides adjustable bracket for installation.

- Universal magnet for flexible mounting
- Optional L bracket
- Cast aluminum casing for harsh environments
- Suitable for most security system

Specification

- 16" armored cable
- Standard Gap 1 ½ " for Closed loop



Wide Gap Closed Loop

- Standard Gap 1" for Open loop
- Maximum Contact Rating :- 100VDC 0.5A 10W
- Dimension :-

Magnet : 100(L) x 12.7(D) x 13.3(H) Reed : 106(L) x 47(D) x 10(H)



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No, 7 Jalan TPP 1/15, Taman Industri Puchong Batu 12, Jalan Puchong, 47100 Puchong Selangor, Malaysia


 TEL
 +603 8061 4589
 +603 8061 3201

 FAX
 +603 8944 1715

 WEB
 www.elock2u.com

 EMAIL
 sales@elock2u.com

Installation Guide

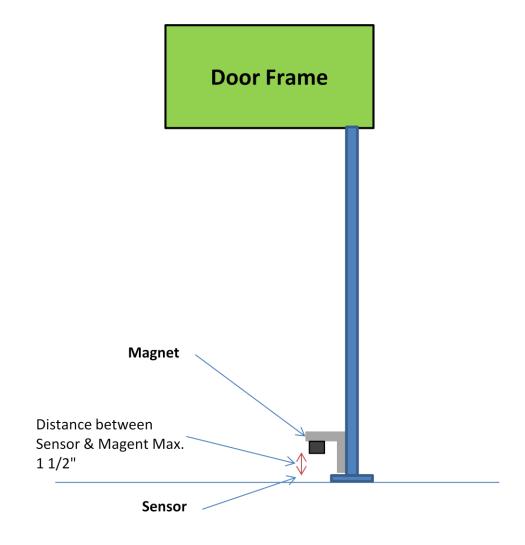



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No, 7 Jalan TPP 1/15, Taman Industri Puchong TEL Batu 12, Jalan Puchong, 47100 Puchong FAX Selangor, Malaysia WEB

 TEL
 +603 8061 4589
 +603 8061 3201

 FAX
 +603 8944 1715

 WEB
 www.elock2u.com

 EMAIL
 sales@elock2u.com