

Stainless Steel Panel with Elegant style Design without Mechanical Bolt

Specification :


- Dimension: 115L x 70W x 29H(mm)
- Input: 12VDC
- Contact Rating: 12-28V, 3A
- Output Contact: +\-\NO\NC\COM
- Mechanical Life: 500,000 tested
- Suitable For Door : Hallow Door
- Operating Temp: -20°C~55°C (14~131F)
- Suitable Humidity: 0~95% (Relative Humidity)
- Detection Range: 0.1~10cm
- Weight: 0.18kg

LED Indicator

White LED	Power OFF
Blue LED	Power ON (standby)
Red LED	Power ON (sensation)

Wiring Diagram

Dimension

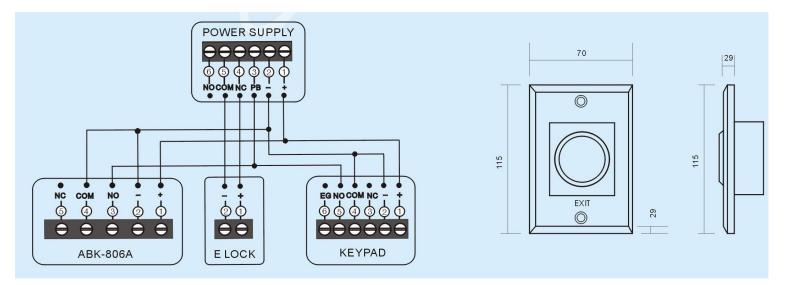



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No, 7 Jalan TPP 1/15, Taman Industri Puchong TEL Batu 12, Jalan Puchong, 47100 Puchong FAX Selangor, Malaysia WEB

 TEL
 +603 8061 4589
 +603 8061 3201

 FAX
 +603 8944 1715

 WEB
 www.elock2u.com

 EMAIL
 sales@elock2u.com