Infrared Sensor Exit Button



Stainless Steel Panel with Elegant style Design without Mechanical Bolt

Specification:

• Dimension: 86L x 86W x 29H(mm)

Input: 12VDC

Contact Rating: 12-28V, 3A
Output Contact: +\-\NO\NC\COM
Mechanical Life: 500,000 tested
Suitable For Door: Hallow Door

Operating Temp: -20°C~55°C (14~131F)
Suitable Humidity: 0~95% (Relative Humidity)

• Detection Range: 0.1~10cm


• Weight: 0.18kg

LED Indicator

White LED	Power OFF
Blue LED	Power ON (standby)
Red LED	Power ON (sensation)

Wiring Diagram

Dimension

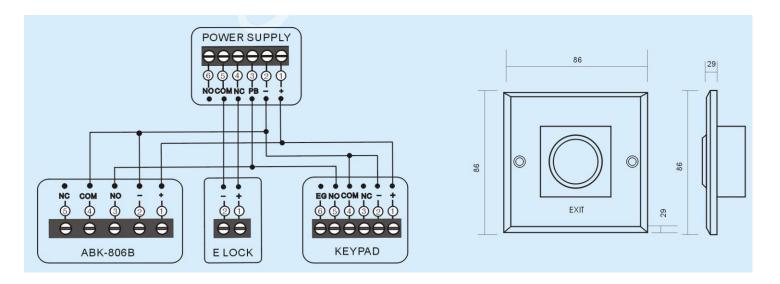



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No, 7 Jalan TPP 1/15, Taman Industri Puchong Batu 12, Jalan Puchong, 47100 Puchong Selangor, Malaysia +603 8061 4589 +603 8061 3201 +603 8944 1715

FAX +603 8944 1715 WEB www.elock2u.com EMAIL sales@elock2u.com

TEL