



Features :



- Resettable design. EL-MCP110 obvious indicators around the edges of the unit.
- Press the pressing plate to enable the output function.
- Pressing plate with status (green and red) shown.
- Reversionary key with non-slip design.
- Built-in buzzer status.
- Input power range from DC12-24V to connect with all types of fire alarm system.
- Easy to assemble, outer case without screws, 3 set of output points to connect other equipment, embedded or surface installations to select.

Specification

- Power Supply : DC 12V ~ DC 24V
- Operation Current :
 - DC 12V : 18mA (Standby) / 75mA (Operation)
 - DC 24V : 11mA (Standby) / 41mA (Operation)
- Buzzer : Set as silent, interval wailing or continuous wailing
- Indicator :
 - Dual color (Red and Green)
 - Red indicator to set blinking, off or on
- Output : N.O / N.C / COM (maximum load 125V/3A)
- Material : ABS, PC
- Protection Degree: IP24
- Dimension : 90L x 93W x 45H (mm)
- Weight : 208g (including wrapping)


*All specifications are subject to change without prior notice

Status :

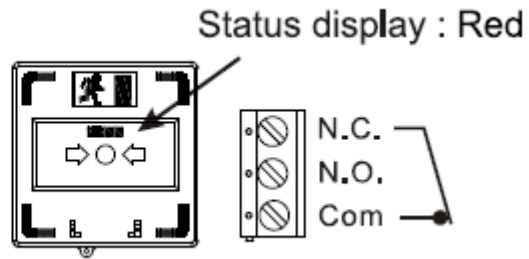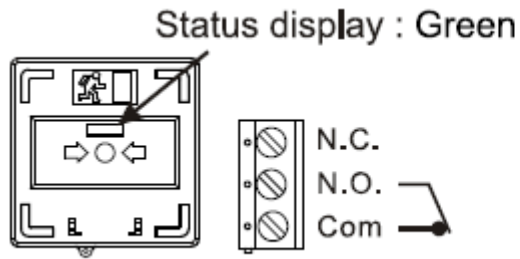


Embedded Installation :


Lateral view

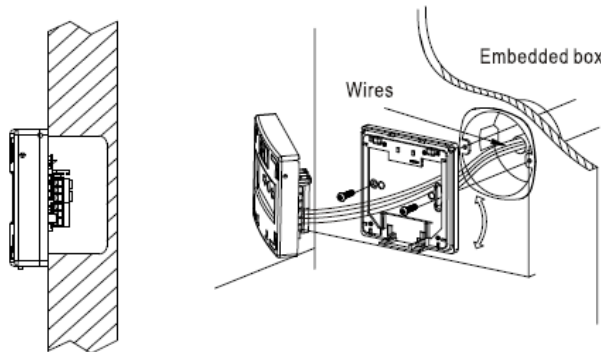

Surface Installation :

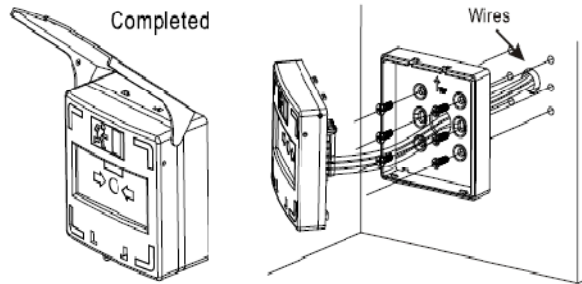

Application Diagram :

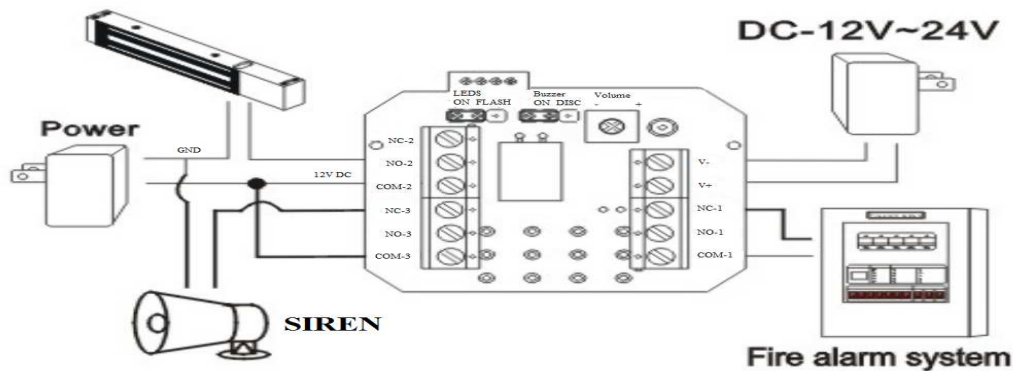

Standby :
Green LED
EM Lock Secure
Siren OFF

Emergency :
Red LED
EM Lock Release
Siren ON
Signal to Fire Alarm System