Power Supply Series



EL-PW-350

Features

elock Power Supply EL-PW-350 offers consistent & reliable regulated full 5 Amps 12 Vdc output. Built in with Battery charger circuit that enables user to have battery backup features with battery.

- Over load protection.
- Built-in backup battery charger.
- Battery low cut-off.
- Output voltage adjustment.
- Weatherproof Casing design (IP55)
- Dimension : 300 mm W x 300 mm H x 145 mm D
- Safety Approval :- CE

Specification

- Input voltage : 220~240 Vac
- Input frequency : 50 Hz
- Output no load voltage : 13.5 Vdc
- Output rated voltage : 13.0 Vdc
- Output rated current : 5.0 Adc
- Load regulation : NL to FL3%
- Battery low cut-off : 10.5 Vdc
- Operating temperature : 0~65 deg C
- Casing Surface finishing : Oven baked Epoxy Powder coating
- IP protection rating : IP55



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No, 7 Jalan TPP 1/15, Taman Industri Puchong Batu 12, Jalan Puchong, 47100 Puchong Selangor, Malaysia


 TEL
 +603 8061 4589
 +603 8061 3201

 FAX
 +603 8944 1715

 WEB
 www.elock2u.com

 EMAIL
 sales@elock2u.com

Back Up DC Power Supply System Diagram

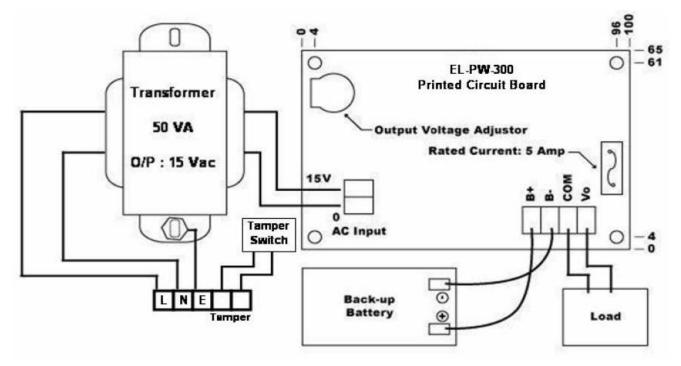



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No, 7 Jalan TPP 1/15, Taman Industri Puchong TEL Batu 12, Jalan Puchong, 47100 Puchong FAX Selangor, Malaysia WEB

 TEL
 +603 8061 4589
 +603 8061 3201

 FAX
 +603 8944 1715

 WEB
 www.elock2u.com

 EMAIL
 sales@elock2u.com