

EL-S50LC series button is casted by 304 stainless steel with drawing panel processing. It is elegant style with long time usage.

Specification:


Parameter	Description
Dimension	86 x 50 x 29 (mm)
Standard Structure	Stainless Steel Panel, Steel Button
Panel Material	304 Stainless Steel, Wire Drawing Finished
Contact Rating	3A@36VDC Max
Output Contact	NO/NC/COM
Mechanical Life	500,000 Tested
Certification	CE Approved
Operating Tempure	10°C ~ 55°C
Weight	140g



KYODENSHA TECHNOLOGIES (M) SDN BHD (2057534-M) DIGIT INNOVATION TECHNOLOGIES (M) SDN BHD (444972-U)

No.12A, Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia Tel: +603-8066 4636 / +603-8051 5788 Fax: +603-8051 4919 / +603-8066 4576 Web: www.elock2u.net Email: enquiry@elock2u.net

Technical Information:

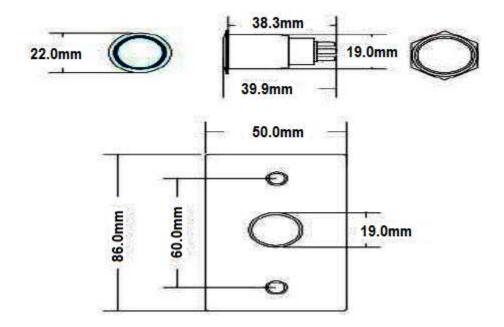



KYODENSHA TECHNOLOGIES (M) SDN BHD (2057534-M) DIGIT INNOVATION TECHNOLOGIES (M) SDN BHD (444972-U)

No.12A, Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia Tel: +603-8066 4636 / +603-8051 5788 Fax: +603-8051 4919 / +603-8066 4576 Web: www.elock2u.net Email: enquiry@elock2u.net