EL-ST886A



EL-ST886A series button is ccastedy 304 stainless steel with drawing panel processing. It is elegant style with long time usage.

Specification :


Parameter	Description
Dimension	86 x 86 x 25 (mm)
Standard Structure	Stainless Steel Panel, Steel Button
Panel Material	304 Stainless Steel, Wire Drawing Finished
Contact Rating	3A@36VDC Max
Output Contact	NO/NC/COM
Mechanical Life	500,000 Tested
Certification	CE Approved
Operating Tempure	10°C ~ 55°C
Weight	120g



KYODENSHA TECHNOLOGIES (M) SDN BHD (2057536-M) DIGIT INNOVATION TECHNOLOGIES (M) SDN BHD (646972-U)

No.12A, Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia Tel : +603-8066 4636 / +603-8051 5788 Fax : +603-8051 4919 / +603-8066 4576 Web : www.elock2u.net Email : enquiry@elock2u.net

Technical Information :

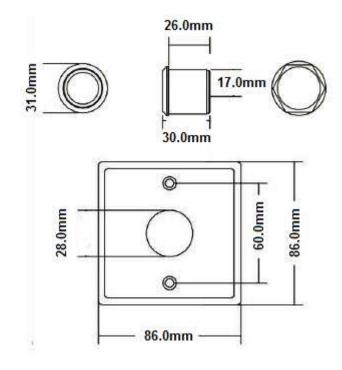



KYODENSHA TECHNOLOGIES (M) SDN BHD (2057536-M) DIGIT INNOVATION TECHNOLOGIES (M) SDN BHD (646972-U)

No.12A, Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia Tel : +603-8066 4636 / +603-8051 5788 Fax : +603-8051 4919 / +603-8066 4576 Web : www.elock2u.net Email : enquiry@elock2u.net