

## **Features**

**elock Power Supply KY-100** offers consistent & reliable regulated full 3 Amps 12Vdc output. Built-in with Battery charger circuit that enables user to have battery back-up features with battery.

- Overload Protection
- Built-in backup battery charger
- Battery low cut-off
- Output voltage adjustment.
- Dimension:- 245mm W x 255mm H x 88mm D
- Safety Approval:- CE

## **Specification**

Input Voltage: 220~240 Vac

Input frequency: 50Hz/60Hz

Output no load voltage: 13.5 Vdc

Output rated voltage: 13.0 Vdc

Output rated current: 3.0 Adc

Load regulation: NL to FL 3%

Battery low cut-off: 10.5 Vdc


■ Operating temperature: 0~65 deg C

Casing Surface finishing: Oven baked Epoxy Powder coating.



WEB www.elock2u.com EMAIL sales@elock2u.com

## **Back Up DC Power Supply System Diagram**

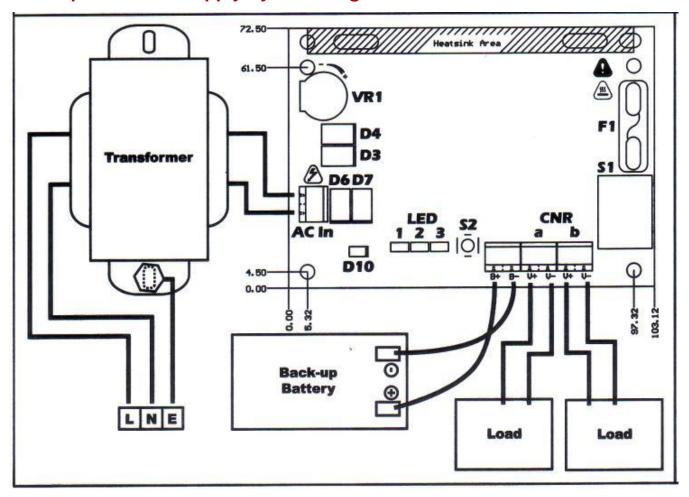



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

FAX +603 8944 1715 WEB www.elock2u.com EMAIL sales@elock2u.com

TEL