

KY-150

Features

elock Power Supply KY-150 offers consistent & reliable regulated full 5 Amps 12 Vdc output. Built in with Battery charger circuit that enables user to have battery backup features with battery.

- Over load protection.
- Built-in backup battery charger.
- Battery low cut-off.
- Output voltage adjustment.
- Dimension : 245 mm W x 255 mm H x 88 mm D
- Safety Approval :- CE

Specification

■ Input voltage: 220~240 Vac

Input frequency : 50 Hz

Output no load voltage : 13.5 Vdc

Output rated voltage : 13.0 Vdc

Output rated current : 5.0 Adc

Load regulation : NL to FL3%

Battery low cut-off: 10.5 Vdc

Operating temperature : 0~65 deg C


Casing Surface finishing: Oven baked Epoxy Powder coating



FAX +603 8944 1715 WEB www.elock2u.com EMAIL sales@elock2u.com

TEL

Back Up DC Power Supply System Diagram

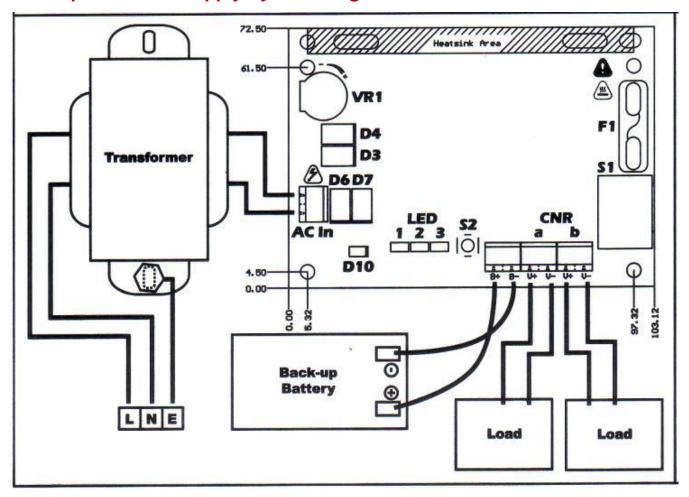



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

FAX +603 8944 1715 WEB www.elock2u.com EMAIL sales@elock2u.com

TEL