

## **Features**

**EL-810R Roller Shutter Sensor** offers High Grade Magnet and provides adjustable bracket for installation.

## **Specification**

- Adjustable Bracket for flexible mounting
- Sensitivity width up to 90 mm
- Double Magnet system for best reliability
- Wire concealed in specially designed
- plastic housing for best protection
- Suitable for most security system
- Maximum Contact Rating :-
- 100VDC 0.5A 10W
- Safety Approved:- CE
- Dimension :- Magnet : 100(L) x 30(W) x 5.5(D) mm



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)


No, 7 Jalan TPP 1/15, Taman Industri Puchong Batu 12, Jalan Puchong, 47100 Puchong Selangor, Malaysia

 TEL
 +603 8061 4589
 +603 8061 3201

 FAX
 +603 8944 1715

 WEB
 www.elock2u.com

 EMAIL
 sales@elock2u.com

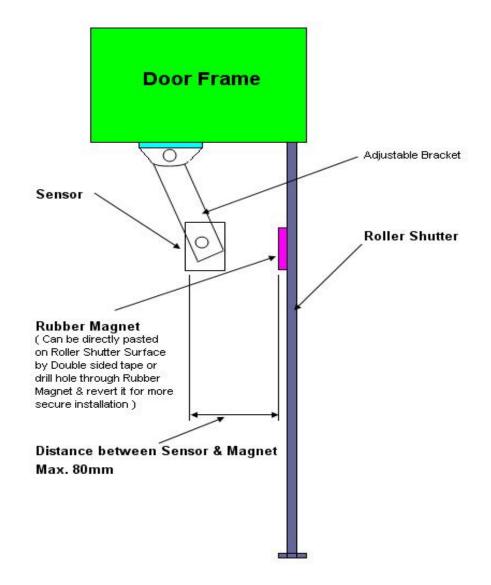



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (640972-U)

No, 7 Jalan TPP 1/15, Taman Industri Puchong TEL Batu 12, Jalan Puchong, 47100 Puchong FAX Selangor, Malaysia WEB

 TEL
 +603 8061 4589
 +603 8061 3201

 FAX
 +603 8944 1715

 WEB
 www.elock2u.com

 EMAIL
 sales@elock2u.com