

**EL-840PD** 

## **Features**

**EL-840PD 3/4" Steel Door Contacts** offers high quality door contact with high grade magnet and designed in miniature size which ease for installation.

- Designed specifically for wooden door and steel door installation with Self-locking housing
- 3/4" diameter press to fit
- Ruthenium Over Gold Reeds
- UL certified PVC Lead Out wire
- UL certified Reed Switch

## **Specification**

- Maximum Contact Rating: 100VDC 0.5A 5W
- Wide Gap up to: 1.1" (28 mm) with Rare Earth Magnet designed for steel door
- Loop Type: Open or Closed
- Reed Form: SPDT
- Dimension (mm): (30 L x 19 Dia) mm
- Safety approvals : CE
- Electrical Specification:

Voltage: 100 V AC/DC max.

Current: 0.5 A max.


Power: 5 W max.




FAX +603 8944 1715 WEB www.elock2u.com EMAIL sales@elock2u.com

TEL

## **User Guide: Product Dimension**

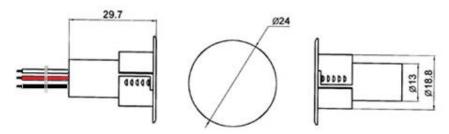

## **Wiring Diagram**





Kyodensha Technologies (M) Sdn Bhd (2057536-M) Information Communication Technologies (M) Sdn Bhd (640944-K-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

FAX +603 8944 1715 WEB www.elock2u.com EMAIL sales@elock2u.com

TEL