Power Supply Series



EL-PW-300

Features

elock Power Supply EL-PW-300 offers consistent & reliable regulated full 3 Amps 12 Vdc output. Built in with Battery charger circuit that enables user to have battery backup features with battery.

- Over load protection.
- Built-in backup battery charger.
- Battery low cut-off.
- Output voltage adjustment.
- Weatherproof Casing design (IP55)
- Dimension : 300 mm W x 300 mm H x 145 mm D
- Safety Approval :- CE

Specification

- Input voltage : 220~240 Vac
- Input frequency : 50 Hz
- Output no load voltage : 13.5 Vdc
- Output rated voltage : 13.0 Vdc
- Output rated current : 3.0 Adc
- Load regulation : NL to FL3%
- Battery low cut-off : 10.5 Vdc
- Operating temperature : 0~65 deg C
- Casing Surface finishing : Oven baked Epoxy Powder coating
- IP protection rating : IP55




Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia

TEL	+603-8066 4636	+603-8051 5788
FAX	+603-8051 4919	
WEB	www.elock2u.net	
EMAIL	enquiry@elock2u	.net

Back Up DC Power Supply System Diagram

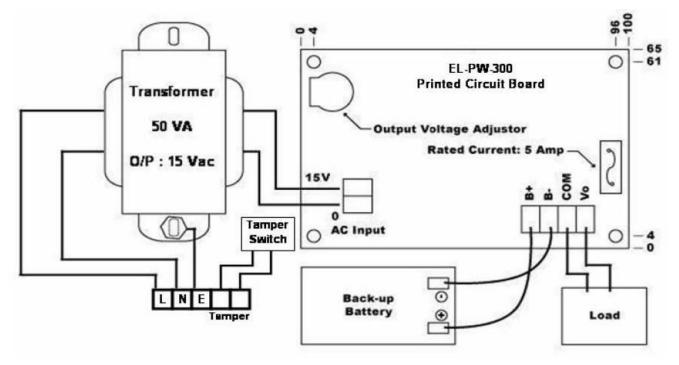



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia

TEL	+603-8066 4636	+603-8051 5788
FAX	+603-8051 4919	
WEB	www.elock2u.net	
EMAIL	enquiry@elock2u	i.net